


9255

6 Way Adjustable Soft Close Face-Framed Hinge



King Slides 6-way adjustable soft close hinges can be easily activated by a switch. This innovative design provides 3-tier soft-close adjustments for users' preference. Its quiet soft close feature makes the face framed cabinetry more convenient and elegant. With the 6-way fine-tuning adjustments the installation became easy and effortless. King Slide is dedicated to continuous creation of various products to enhance better life quality you deserve.



• 3-tier soft-close adjustment

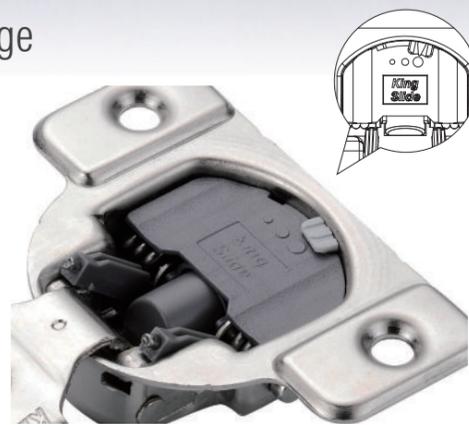

Minimum Reveal

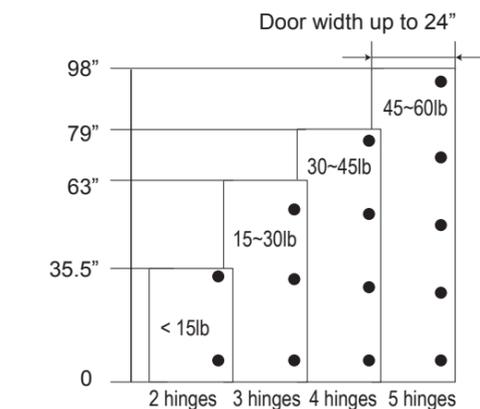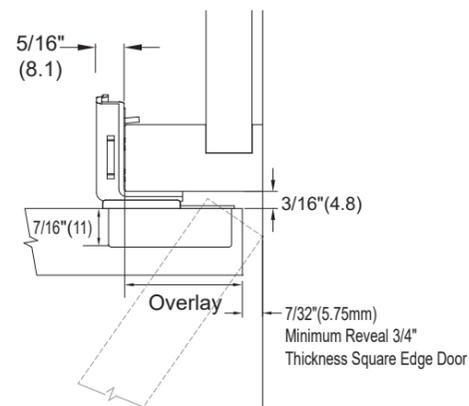

Hinge Qty	2	3	4	5
Load Capacity	<15lbs	15~30lbs	30~45lbs	45~60lbs


9255-A2 Partial Overlay Hinges

- **Cup Diameter:** 35mm(1-3/8")
- **Cup Depth:** 11mm (7/16")
- **Opening:** 105 °
- **Finish:** Nickel-plated
- **Material:** Cold rolled steel
- **Overlay:** 5/16" (7.9mm), 3/8" (9.5mm), 7/16" (11.1mm), 1/2" (12.7mm), 9/16" (14.3mm), 5/8" (15.9mm), 3/4"(19.1mm)




Dimension

Unit: inch (mm)

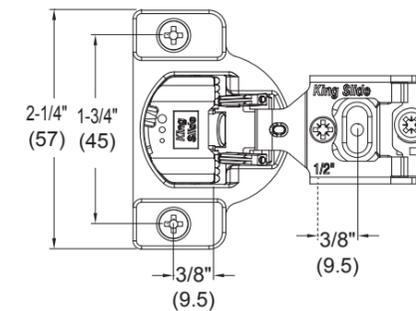



Boring Pattern

Unit: inch (mm)

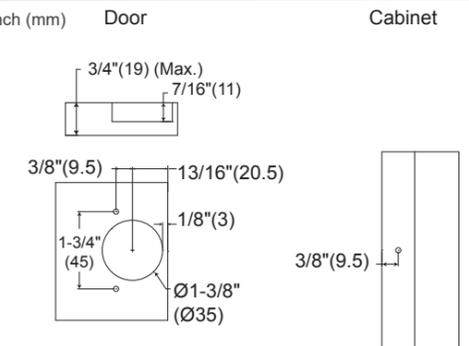

Door Overlay


Unit: inch (mm)

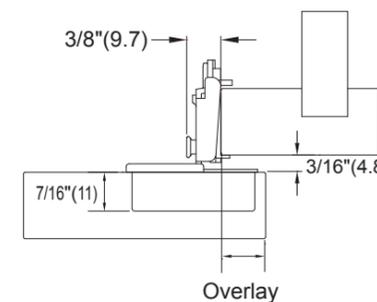

Item No.	Screws (Without Dowel)	Knock-in Dowes
9255-A2		
Overlay inch (mm)	Model No.	Model No.
5/16" (7.9)	9255-A22E-NZH.554C	9255-A23E-NZH.554C
3/8" (9.5)	9255-A22F-NZH.554C	9255-A23F-NZH.554C
7/16" (11.1)	9255-A22G-NZH.554C	9255-A23G-NZH.554C
1/2" (12.7)	9255-A22H-NZH.554C	9255-A23H-NZH.554C
*1/2" (12.7)	9255-A22H-NZH.552C	9255-A23H-NZH.552C
9/16" (14.3)	9255-A22I-NZH.554C	9255-A23I-NZH.554C
5/8" (15.9)	9255-A22J-NZH.554C	9255-A23J-NZH.554C
3/4" (19.1)	9255-A22L-NZH.554C	9255-A23L-NZH.554C

* Available as edge mount hinge

Assembly and Adjustments

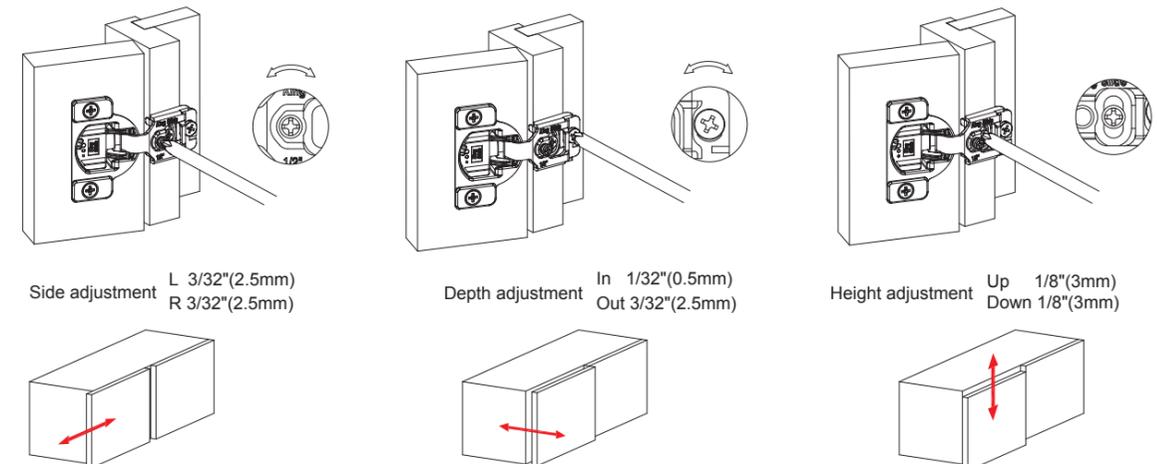




9255-B2 Full Overlay Hinges

- **Cup Diameter:** 35mm(1-3/8")
- **Cup Depth:** 11mm (7/16")
- **Opening:** 105 °
- **Finish:** Nickel-plated
- **Material:** Cold rolled steel
- **Overlay:** 1" (25.4mm), 1-1/4" (31.7mm), 1-5/16" (33.3mm), 1-3/8"(34.9 mm)1-7/16" (36.5mm), 1-1/2" (38.1mm) , 1-9/16" (39.7mm)
- **Minimum Reveal:** 17/64"(6.75mm)


Dimension

Unit: inch (mm)

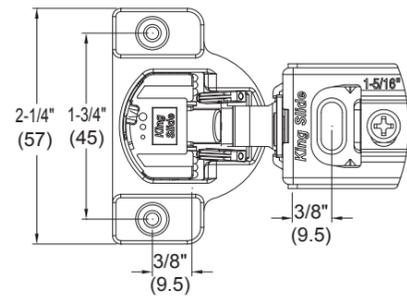


Boring Pattern

Unit: inch (mm)

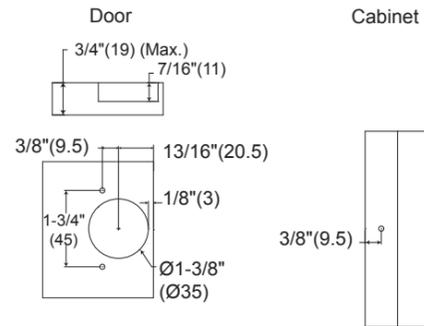


Door Overlay

Unit: inch (mm)

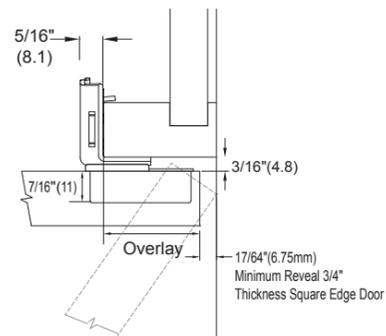

Item No.	Screws (Without Dowels)	Knock-in Dowels
9255-B2		
Overlay inch (mm)	Model No.	Model No.
1" (25.4mm)	9255-B22P-NZH.553C	9255-B23P-NZH.553C
1-1/4" (31.7mm)	9255-B22D-NZH.553C	9255-B23D-NZH.553C
1-5/16" (33.3mm)	9255-B22E-NZH.553C	9255-B23E-NZH.553C
1-3/8" (34.9mm)	9255-B22F-NZH.553C	9255-B23F-NZH.553C
1-7/16" (36.5mm)	9255-B22G-NZH.553C	9255-B23G-NZH.553C
1-1/2" (38.1mm)	9255-B22H-NZH.553C	9255-B23H-NZH.553C
1-9/16" (39.7mm)	9255-B22I-NZH.553C	9255-B23I-NZH.553C

Assembly and Adjustments

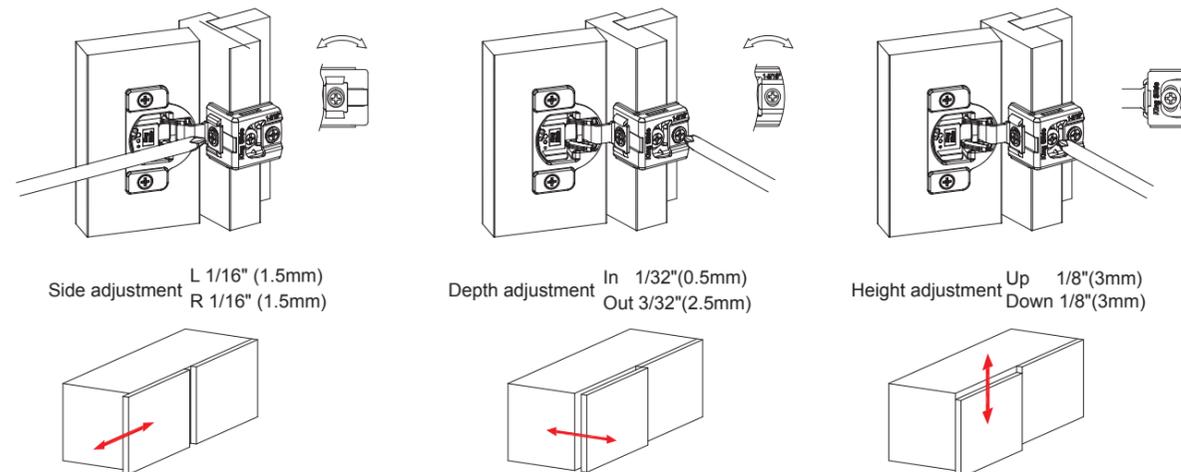


9255-C2 Full Overlay Hinges

(four way adjustments)

- **Cup Diameter:** 35mm(1-3/8")
- **Cup Depth:** 11mm (7/16")
- **Opening:** 105 °
- **Finish:** Nickel-plated
- **Material:** Cold rolled steel
- **Overlay:** 1-3/8" (34.9mm) or greater


Dimension

Unit: inch (mm)

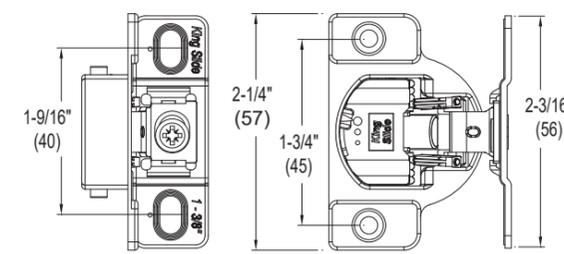


Boring Pattern

Unit: inch (mm)

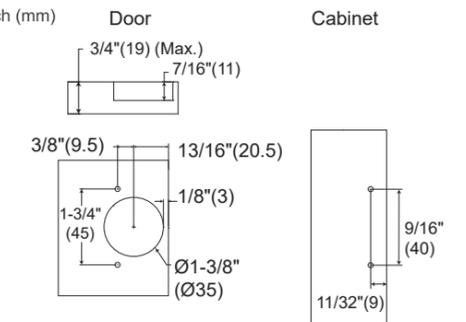

Door Overlay

Unit: inch (mm)

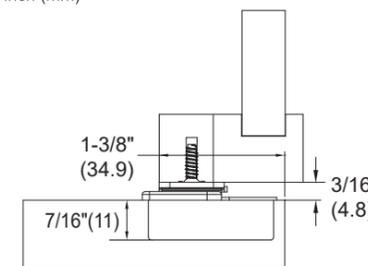

Item No.	Screws (Without Dowel)	Knock-in Dowels
9255-C2		
Overlay inch (mm)	Model No.	Model No.
1-3/8" (34.9mm)	9255-C22F-NZH.551C	9255-C23F-NZH.551C

Assembly and Adjustments

