


CGS Undermount Slide Series

FULL-EXTENSION UNDERMOUNT FRAMELESS SLIDES



Specifications

Length: 9" - 21" (229mm - 533mm)
Travel: Full Extension
Mount: Undermount
Dynamic Load: 35kg / 75lb Pair
Static Load: 45kg / 100 lb
(Max) Disconnect: Lever Disconnect
Finish: Zinc Plated
Material: Cold Rolled Steel

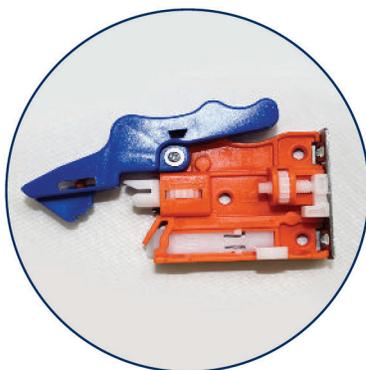

Features

- Quick and Easy up/down, left/right and front/back adjustments
- Adjustment Range: 0-3mm Height, 0-2.5mm Depth, + 1.5mm Lateral
- Silent system guarantees smooth no noise Cushion Close operation
- Industry Standard drilling pattern based upon 32mm system
- Tool Free assembly and removal
- Limited Lifetime Warranty

Applications

- Kitchen & Bath Cabinets
- Store Fixtures
- Architectural Millwork
- Office Furniture
- Medical Equipment Storage Carts & Storage Racks
- Carts & Storage Racks
- Manufactured Housing

Full Extension Slide

Cushion Close Undermount Slide



Frameless Full-Extension Cushion Close Undermount

| Item | Description |
|-------|-------------|
| 250mm | 280-212 |
| 300mm | 280-213 |
| 350mm | 280-214 |
| 400mm | 280-215 |
| 450mm | 280-216 |
| 500mm | 280-217 |
| 550mm | 280-218 |


Frameless Full-Extension Push-to-Open Undermount

| Item | Description |
|--------|-------------|
| 250mm | 280-232 |
| 300mm | 280-233 |
| 350mm | 280-234 |
| 400mm | 280-235 |
| 450mm | 280-236 |
| 500mm | 280-237 |
| 550mm* | 280-23 |


*special order

Dimensional Specifications

The drawer slide with locking brackets installation size

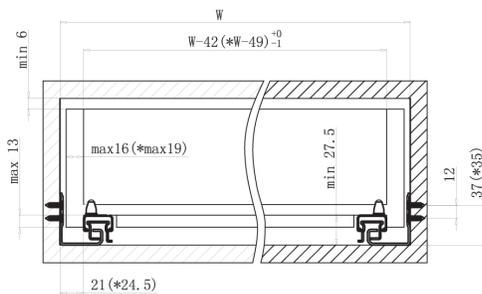

Rear connecting link installation size



Undermount Slide Front Brackets




Front Fixing Bracket Screw-In Set

| | |
|--------------------------------|----------|
| 2-way adjustable front bracket | 280-1068 |
| 6-way adjustable front bracket | 280-1067 |


W: internal cabinet width
 L: drawer length
 NL: assembling dimensions length
 DL: internal cabinet depth
 X: the drawer board thickness

Standard drawer

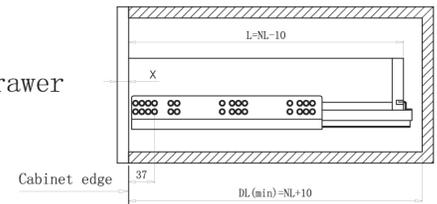

| | | | | | | | | |
|------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|
| assembling dimensions length | 250 | 300 | 350 | 400 | 450 | 500 | 550 | 600 |
| Drawer length | 240 | 290 | 340 | 390 | 440 | 490 | 540 | 590 |

Inner drawer

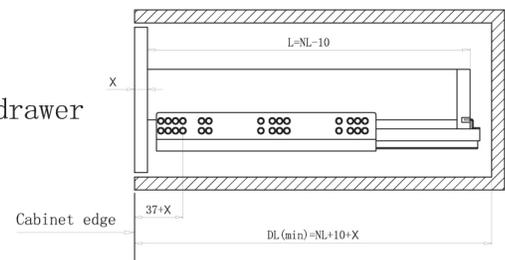

| | | | | | | | | |
|------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|
| assembling dimensions length | 250 | 300 | 350 | 400 | 450 | 500 | 550 | 600 |
| Drawer length | 240 | 290 | 340 | 390 | 440 | 490 | 540 | 590 |

